ISO 4032 Hexagon regular nuts - Basic dimensions

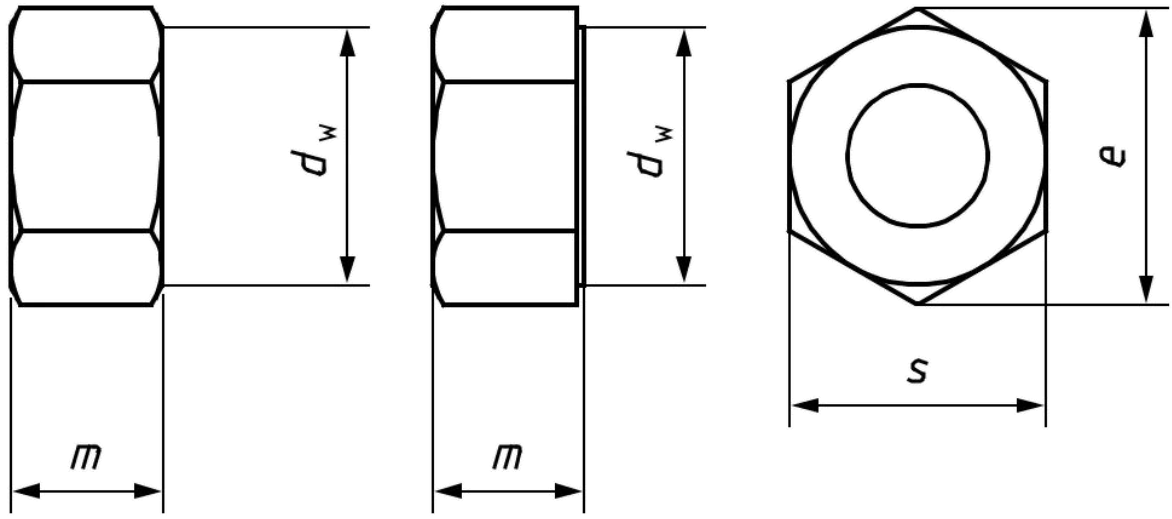

ISO 4032 Hexagon regular nuts - Basic dimensions

Selected sizes used for CE Marking under EN 15048

Dimension (d)	M12	M16	M20	M22	M24	M27	M30	M33	M36
Thread pitch (pa)	1.75	2	2.5	2.5	3	3	3.5	3.5	4
m	10.37-10.80	14.10-14.80	16.90-18.00	18.10-19.40	20.20-21.50	22.50-23.80	24.30-25.60	27.40-28.70	29.40-31.00
dw (min)	16.63	22.49	27.70	31.35	33.25	38.00	42.75	46.55	51.11
s	17.73-18.00	23.67-24.00	29.16-30.00	33.00-34.00	35.00-36.00	40.00-41.00	45.00-46.00	49.00-50.00	53.80-55.00
e (min)	20.03	26.75	32.95	37.29	39.55	45.20	50.85	55.37	60.79

Dimensions in millimetres

Whilst the information is provided in good faith, Andrews Fasteners Ltd are not under any responsibility or liability in respect of errors or information that was found to be incorrect or for any reliance the user may place on it.

ANDREWS FASTENERS LTD
Unit 8, Latchmore Park, Latchmore Road, Leeds, LS12 6DN, West Yorkshire, United Kingdom
+44 (0) 113 246 9992 | sales@andrewsfasteners.uk | www.andrewsfasteners.uk